


LED-DISCO-PANEL “EQUALIZER”

LED-EQUALIZER-PANEL is the pulse of the night! LED-EQUALIZER-PANEL is the rhythm of FUN! If music had a heart, it would beat with LED-EQUALIZER-PANEL!

Measure the unmeasurable pleasure of your clients with LED-EQUALIZER-PANEL! One LED-EQUALIZER-PANEL is composed of five tubes. It can easily be fitted to your wall size. With our “Sound to Light” option you can control these panels in the best way. LED-EQUALIZER-PANEL is made of unbreakable, translucent, mirrored plastic, 1 mm (0.04”) thick or 2 mm (0.08”) - anti crash tests approved.

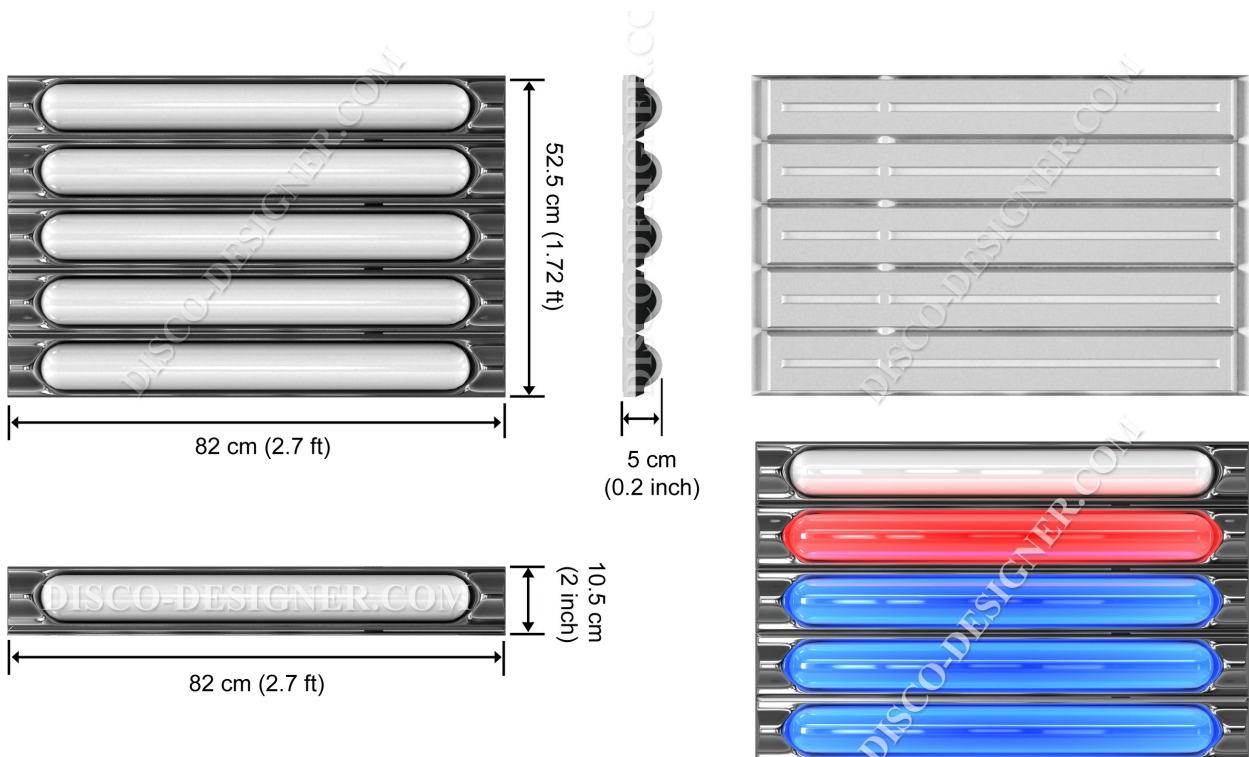

PRODUCT FEATURES

- Unlimited programming effects
- 32-bit colour (16.7 million color combinations)
- Modular & highly portable
- Computer-controlled by wire system
- Dozens of preset effects
- No technical experience required
- Quick and easy installation
- More affordable than any existing solutions
- Sealed for long, durable lifetime
- No bulbs to replace
- Indoor use in well tempered rooms

SPECIFICATIONS

Physical Specifications

Base type	LED-Disco-Panel EQUALIZER
Material	non breakable, hardly inflammable plastic, RGB DMX LED material thickness: 1mm or 2 mm (0.04 inch or 0.08 inch)
Color	RGB - 16.7 million colors with LIGHT "ON" Each Equalizer-Tube has his own DMX address
Size Panel: WxHxD	82 cm x 52.5 cm x 5 cm (2.7 ft x 1.72 ft x 2 inch)
WeightPanel	2.5 kg if material thickness 1 mm (0.04 inch) 3.1 kg if material thickness 2 mm (0.08 inch)
Size Tube: WxHxD	82 cm x 10.5 cm x 5 cm (2.7 ft x 1.72 ft x 2 inch)
Alert	the Tubes can be separated by cutting from each other, which can only be made in our factory, accordingly to the sizes of the customer's area, which will be decorated with this product

Electrical Specifications

Power Consumption	< 20 W
Power Requirement	12 V DC / System Voltage = 220 V <u>and</u> 110 V
LED's working time	up to 100 000 hours

Important !

When installing our LED-products, please employ an electrician, who can exactly follow our installation instructions.

Disclaimer

While every care has been taken with the details on this specification sheet, we take no responsibility for any inaccuracies caused during installation. We reserve the right to change these specifications without notice to always ensure that the customer is receiving a superior product.